


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "A"
mit Gewindebolzen, beidseitig

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

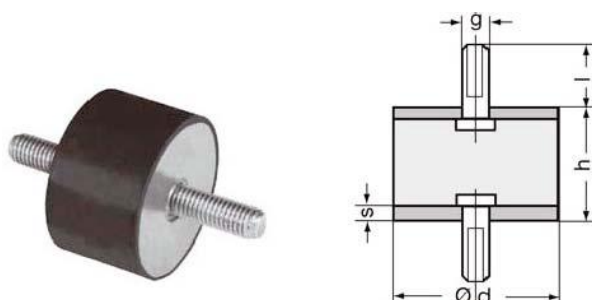

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-01-0808	8	8	M3	6	2
H-01-01010	10	10	M4	11	2
H-01-01015	10	15	M4	12	2
H-01-01021	10	21	M4	11	2
H-01-01310	13	10	M4	12	2
H-01-01508	15	8	M4	12	2
H-01-01510	15	10	M4	12	2
H-01-01515	15	15	M4	12	2
H-01-01520	15	20	M4	12	2
H-01-01530	15	30	M4	12	2
H-01-018/8,5	18	8,5	M4	18	2
H-01-01810	18	10	M4	18	2
H-01-02008	20	8	M6	18	2,5
H-01-02010	20	10	M6	18	2,5
H-01-02012	20	12	M6	18	2,5
H-01-02015	20	15	M6	18	2,5
H-01-02020	20	20	M6	18	2,5
H-01-02025	20	25	M6	18	2,5
H-01-02510	25	10	M6	18	2,5
H-01-02515	25	15	M6	18	2,5
H-01-02520	25	20	M6	18	2,5

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-01-02525	25	25	M6	18	2,5
H-01-02530	25	30	M6	18	2,5
H-01-03012	30	12	M8	23	2,5
H-01-03015	30	15	M8	23	2,5
H-01-03020	30	20	M8	23	2,5
H-01-03025	30	25	M8	23	2,5
H-01-03030	30	30	M8	23	2,5
H-01-03040	30	40	M8	23	2,5
H-01-03516	35	16	M8	23	2,5
H-01-04008	40	8	M8	23	2,5
H-01-04015	40	15	M8	23	2,5
H-01-04020	40	20	M8	23	2,5
H-01-04025-M8	40	25	M8	23	2,5
H-01-04025-M10	40	25	M10	20	2,5
H-01-04030	40	30	M8	23	2,5
H-01-04030-M10	40	30	M10	23	2,5
H-01-04035	40	35	M8	23	2,5
H-01-04040	40	40	M8	23	2,5
H-01-04050	40	50	M8	23	2,5