


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "A"
mit Gewindebolzen, beidseitig

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

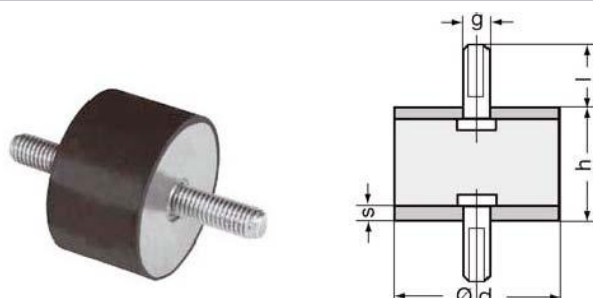

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-01-05015	50	15	M10	28	2,5
H-01-05017	50	17	M10	28	2,5
H-01-05020	50	20	M10	28	2,5
H-01-05025	50	25	M10	28	2,5
H-01-05030	50	30	M10	28	2,5
H-01-05040	50	40	M10	28	2,5
H-01-05045	50	45	M10	28	2,5
H-01-05050	50	50	M10	28	2,5
H-01-05080	50	80	M10	28	2,5
H-01-06020-M10	60	20	M10	28	2,5
H-01-06020-M12	60	20	M12	37	2,5
H-01-06030-M10	60	30	M10	28	2,5
H-01-06030-M12	60	30	M12	37	2,5
H-01-06040-M10	60	40	M10	28	2,5
H-01-06040-M12	60	40	M12	37	2,5
H-01-06050	60	50	M10	28	2,5
H-01-06060-M10	60	60	M10	28	2,5
H-01-06560	65	60	M10	28	2,5
H-01-07030	70	30	M10	28	2,5
H-01-07040-M10	70	40	M10	28	2,5
H-01-07045-M10	70	45	M10	28	2,5
H-01-07045-M12	70	45	M12	37	2,5
H-01-07050	70	50	M10	28	2,5
H-01-07055	70	55	M10	28	2,5
H-01-07060	70	60	M10	28	2,5
H-01-07525	75	25	M12	37	2,5
H-01-07530	75	30	M12	37	2,5
H-01-07540	75	40	M12	37	2,5

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-01-07545	75	45	M12	37	2,5
H-01-07550	75	50	M12	37	2,5
H-01-07555	75	55	M12	37	2,5
H-01-07560	75	60	M12	37	2,5
H-01-07570	75	70	M12	37	2,5
H-01-07575	75	75	M12	37	2,5
H-01-08030	80	30	M12	37	2,5
H-01-08040	80	40	M12	37	2,5
H-01-08585	85	85	M16	43	2,5
H-01-10040	100	40	M16	43	3
H-01-10050	100	50	M16	43	3
H-01-10055	100	55	M16	43	3
H-01-10060	100	60	M16	43	3
H-01-10075	100	75	M16	43	3
H-01-12575	125	75	M16	43	4
H-01-15050	150	50	M16	43	4
H-01-15055	150	55	M16	43	4
H-01-15075	150	75	M16	43	4
H-01-150100	150	100	M16	43	4
H-01-200100	200	100	M20	45	6