


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "B"

mit Gewindebolzen einerseits,
Innengewinde andererseits

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

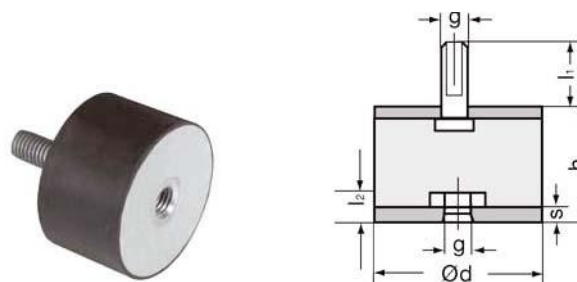

Artikel Nr.	Abmessungen in mm					
	Ø d	h	g	l1	l2	s
H-02-0607	6	7	M3	6	3	2
H-02-0808	8	8	M3	6	3	2
H-02-01008	10	8	M4	10	4	2
H-02-01010	10	10	M4	10	4	2
H-02-01015	10	15	M4	10	4	2
H-02-01020	10	20	M4	10	4	2
H-01310	13	10	M4	10	4	2
H-02-01508	15	8	M4	10	4	2
H-02-01510	15	10	M4	10	4	2
H-02-01512	15	12	M4	10	4	2
H-02-01515	15	25	M4	10	4	2
H-02-01520	15	20	M4	10	4	2
H-02-01525	15	25	M4	11	4	2
H-02-01530	15	30	M4	10	4	2
H-02-02015	20	15	M6	18	6	2,5
H-02-02020	20	20	M6	18	6	2,5
H-02-02025	20	25	M6	18	6	2,5
H-02-02030	20	30	M6	18	6	2,5
H-02-02515	25	15	M6	18	6	2,5
H-02-02520	25	20	M6	18	6	2,5
H-02-02525	25	25	M6	18	6	2,5
H-02-02530	25	30	M6	18	6	2,5
H-02-02535	25	35	M6	18	6	2,5
H-02-02540	25	40	M6	18	6	2,5
H-02-03015	30	15	M8	23	8	2,5
H-02-03020	30	20	M8	23	8	2,5
H-02-03025	30	25	M8	23	8	2,5
H-02-03030	30	30	M8	23	8	2,5
H-02-03040	30	40	M8	23	8	2,5
H-02-03045	30	45	M8	23	8	2,5
H-02-03085	30	85	M8	23	8	2,5

Artikel Nr.	Abmessungen in mm					
	Ø d	h	g	l1	l2	S
H-02-04020	40	20	M8	23	8	2,5
H-02-04020-M10	40	20	M10	28	10	2,5
H-02-04025-M8	40	25	M8	23	8	2,5
H-02-04035	40	35	M8	23	8	2,5
H-02-04040	40	40	M8	23	8	2,5
H-02-04045	40	45	M8	23	8	2,5
H-02-04550	45	50	M8	23	8	2,5
H-02-05020	50	20	M10	28	10	2,5
H-02-05025	50	25	M10	28	10	2,5
H-02-05030	50	30	M10	28	10	2,5
H-02-05040	50	40	M10	28	10	2,5
H-02-05045	50	45	M10	28	10	2,5
H-02-05050	50	50	M10	28	10	2,5
H-02-05055	50	55	M10	28	10	2,5
H-02-05080	50	80	M10	28	10	2,5
H-02-06030	60	30	M10	28	10	2,5
H-02-06030-M12	60	30	M12	37	12	2,5
H-02-06040	60	40	M10	28	10	2,5
H-02-06040-M12	60	40	M12	37	12	2,5
H-02-06045	60	45	M10	28	10	2,5
H-02-06045-M12	60	45	M12	37	12	2,5
H-02-06050	60	50	M10	28	10	2,5
H-02-06050-M12	60	50	M12	37	12	2,5
H-02-06060	60	60	M10	28	10	2,5
H-02-06060-M12	60	60	M12	37	12	2,5