


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "B"

mit Gewindebolzen einerseits,
Innengewinde andererseits

Naturkautschuk in 55° shore -"mittel"

Auf Anfrage auch in 45°, 65°, 70° Shore

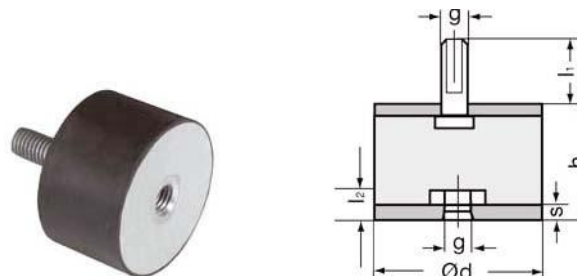

Artikel Nr.	Abmessungen in mm					
	Ø d	h	g	l1	l2	s
H-02-07030	70	30	M10	28	10	2,5
H-02-07040	70	40	M10	28	10	2,5
H-02-07040-M12	70	40	M12	37	12	2,5
H-02-07045	70	45	M10	28	10	2,5
H-02-07045-M12	70	45	M12	37	12	2,5
H-02-07050	70	50	M10	28	10	2,5
H-02-07055	70	55	M10	28	10	2,5
H-02-07055-M12	70	55	M12	37	12	2,5
H-02-07525	75	25	M12	37	12	2,5
H-02-07530	75	30	M12	37	12	2,5
H-02-07540	75	40	M12	37	12	2,5
H-02-07545	75	45	M12	37	12	2,5
H-02-07550	75	50	M12	37	12	2,5
H-02-07555	75	55	M12	37	12	2,5
H-02-07570	75	70	M12	37	12	2,5
H-02-08030	80	30	M12	37	12	2,5
H-02-08040	80	40	M12	37	12	2,5
H-02-08585	85	85	M12	37	12	2,5
H-02-10040	100	40	M16	43	16	2,5
H-02-10050	100	50	M16	43	16	2,5
H-02-10055	100	55	M16	43	16	2,5
H-02-10060	100	60	M16	43	16	2,5
H-02-10075	100	75	M16	43	16	2,5
H-02-10090	100	90	M16	43	16	2,5

Artikel Nr.	Abmessungen in mm					
	Ø d	h	g	l1	l2	S
H-02-12570	125	70	M16	43	16	2,5
H-02-12575	125	75	M16	43	16	2,5
H-02-125100	125	100	M16	43	16	2,5
H-02-15050	150	50	M16	43	16	2,5
H-02-15055	150	55	M16	43	16	2,5
H-02-15075	150	75	M16	43	16	2,5
H-02-150150	150	150	M16	43	16	2,5
H-02-150200	150	200	M16	43	16	2,5
H-02-200100	200	100	M20	45	20	2,5
H-02-200250	200	250	M20	45	20	2,5