


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "D"
mit Gewindebolzen, einseitig

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

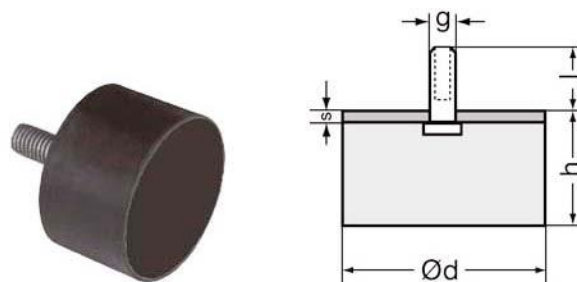

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-04-04035	40	35	M8	23	2,5
H-04-04040	40	40	M8	23	2,5
H-04-04040-M10	40	40	M10	28	2,5
H-04-04045	40	45	M8	23	2,5
H-04-04050	40	50	M8	23	2,5
H-04-04055	40	55	M8	23	2,5
H-04-05010	50	10	M10	28	2,5
H-04-05012	50	12	M10	28	2,5
H-04-05015	50	15	M10	28	2,5
H-04-05017	50	17	M10	28	2,5
H-04-05020	50	20	M10	28	2,5
H-04-05025	50	25	M10	28	2,5
H-04-05030	50	30	M10	28	2,5
H-04-05040	50	40	M10	28	2,5
H-04-05045	50	45	M10	28	2,5
H-04-05050	50	50	M10	28	2,5
H-04-05060	50	60	M10	28	2,5
H-04-05080	50	80	M10	28	2,5
H-04-06020-M10	60	20	M10	28	2,5
H-04-06020-M12	60	20	M12	37	2,5
H-04-06030	60	30	M10	28	2,5
H-04-06030-M12	60	30	M12	37	2,5
H-04-06040-M12	60	40	M12	37	2,5
H-04-06050-M10	60	50	M10	28	2,5
H-04-06050-M12	60	50	M12	37	2,5
H-04-06060-M12	60	60	M12	37	2,5
H-04-07025	70	25	M10	28	2,5
H-04-07040	70	40	M10	28	2,5
H-04-07040-M12	70	40	M12	37	2,5

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-04-07045	70	45	M10	28	2,5
H-04-07045-M12	70	45	M12	37	2,5
H-04-07050-M10	70	50	M10	28	2,5
H-04-07050-M12	70	50	M12	37	2,5
H-04-07515	75	15	M12	37	2,5
H-04-07520	75	20	M12	37	2,5
H-04-07525	75	25	M12	37	2,5
H-04-07540	75	40	M12	37	2,5
H-04-07545	75	45	M12	37	2,5
H-04-07550	75	50	M12	37	2,5
H-04-07555	75	55	M12	37	2,5
H-04-07560	75	60	M12	37	2,5
H-04-07570	75	70	M12	37	2,5
H-04-10025	100	25	M16	43	3
H-04-10036	100	36	M16	43	3
H-04-10040	100	40	M16	43	3
H-04-10050	100	50	M16	43	3
H-04-10055	100	55	M16	43	3
H-04-10060	100	60	M16	43	3
H-04-10075	100	75	M16	43	3
H-04-100100	100	100	M16	43	3
H-04-15050	150	50	M16	43	4
H-04-15055	150	55	M16	43	4
H-04-15075	150	75	M16	43	4
H-04-200200-M16	200	200	M16	43	6