


Gummi-Metall-Puffer

Gummi-Metall-Puffer, Typ "K"
konisch, mit Gewindebolzen, einseitig

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

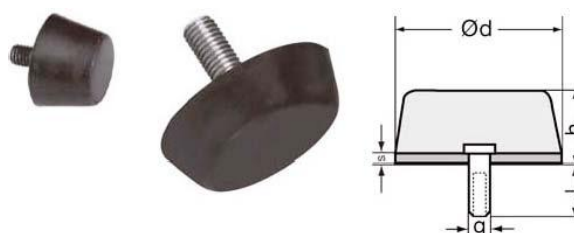


Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-K-08x07	8	7	M4	8	2
H-K-015x10	15	10	M4	10	2
H-K-01512	15	12	M4	13	2
H-K-020x17	20	17	M5	18	2,5
H-K-20,5x13	20	13	M8	20	2,5
H-K-025x05	25	5	M6	18	2,5
H-K-025x12	25	12	M6	18	2,5
H-K-025x15	25	15	M4	13	2,5
H-K-025x17	25	17	M6	18	2,5
H-K-025x20	25	20	M6	18	2,5
H-K-025x22	25	22	M6	13	2,5
H-K-025x28	25	28	M6	18	2,5
H-K-025x35	25	35	M6	18	2,5

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-K-030x15	30	15	M8	23	2,5
H-K-030x20	30	20	M8	23	2,5
H-K-030x25	30	25	M8	23	2,5
H-K-030x28	30	28	M8	23	2,5
H-K-030x40	30	40	M8	23	2,5
H-K-035x40	35	40	M8	23	2,5
H-K-040x25	40	25	M10	28	2,5
H-K-050x17	50	17	M10	28	2,5
H-K-050x18	50	18	M10	28	2,5
H-K-050x20	50	20	M10	28	2,5
H-K-050x30	50	30	M10	28	2,5
H-K-050x40	50	40	M10	28	2,5
H-K-050x55	50	55	M10	28	2,5
H-K-80x28	80	28	M12	37	2,5

Gummi-Metall-Puffer, Typ "TB"
Dieser Artikel ist nur auf Anfrage erhältlich.
tailliert, mit Gewindebolzen und Innengewinde

Naturkautschuk in 55° shore -"mittel"
Auf Anfrage auch in 45°, 65°, 70° Shore

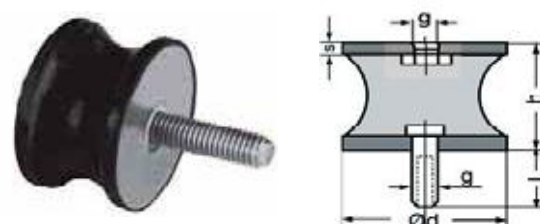

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-T02-15x15	15	15	M4	13	2
H-T02-15x30	15	30	M4	13	2
H-T02-18x12	18	12	M6	18	2
H-T02-20x15	20	15	M6	18	2,5
H-T02-25x20	25	20	M6	18	2,5
H-T02-30x15	30	15	M8	23	2,5
H-T02-30x20	30	20	M8	23	2,5
H-T02-30x25	30	25	M8	23	2,5
H-T02-30x30	30	30	M8	23	2,5
H-T02-30x40	30	40	M8	23	2,5

Artikel Nr.	Abmessungen in mm				
	Ø d	h	g	l	S
H-T02-40x30	40	30	M8	23	2,5
H-T02-40x48	40	48	M8	23	2,5
H-T02-40x50	40	50	M8	23	2,5
H-T02-50x30	50	30	M10	28	2,5
H-T02-50x40	50	40	M10	28	2,5
H-T02-60x50	60	50	M10	28	2,5
H-T02-60x65	60	65	M10	28	2,5
H-T02-75x35	75	35	M12	37	2,5
H-T02-75x40	75	40	M12	37	2,5
H-T02-100x75	100	75	M16	43	3